


# Fiber optic distribution boxes

## Fiber optic distribution box GFP-24N-WH, 24F, 24:4

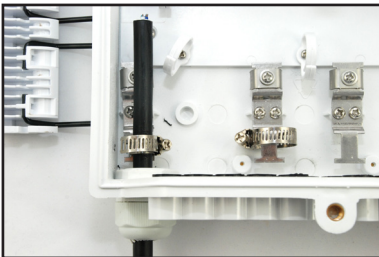

### Features

### Fiber optic distribution box GFP-24N-WH

Number of ports	4 optical fiber cable inlets 24 optical fiber cable outlets
Material	PC+ABS
Colour	White
Dimensions	330x220x85 mm
Range of diameters of outlet cables	1-16 mm
Weight	1.6 kg
Protection	IP65
Integrated splice tray	1
Number of slots for adapters	24 (SC simplex/LC duplex)
Operating temperature	-35°C~+70°C

### Equipment

Fiber optic splice sleeves: 16

Fiber protective tube

Cable ties

Installation accessories

Metal hose clamps for cables

Keys to the lock

### Application

FTTH

FTTB

- Splice sleeves protection of fiber optic cables against mechanical dangers
- Low and high temperature resistant
- UV resistant

- External slots equipped with cable glands PG19
- Central duple slots (max. diameter of cables 18 mm)
- Sealing sleeves for outlet cables
- Wall or pole fixing

