


INSTRUCTION MANUAL


2 IN 1 - SURFACE OR RECESSED LED BACKLIT PANEL



02 YEAR
WARRANTY*



Non-replaceable light source



Non-replaceable control gear

MODEL	SKU	WATTS	LUMENS	BEAM ANGLE	DF	CRI	LIFE SPAN	ON/OFF CYCLE	BODY TYPE	OPERATION TEMPERATURE	DIMENSION	INPUT POWER
VT-6139	638011 638021 6380 63801 6381 63811	36	3960	110	≥0.9	≥80	20,000Hr	>15,000 Times	PP+Fe	-20°C to +40°C	595x595x30mm	AC:220-240V 50/60Hz

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING!

1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. Proper grounding should be ensured throughout the installation.
6. For Indoor use only



MULTI-LANGUAGE MANUAL QR CODE


Please scan the QR code to access the manual in multiple languages.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



Luminaires not suitable for covering with thermally insulating material.

RoHS




UK
CA




INSTALLATION

Installation for Recessed


1. Make a hole into the ceiling

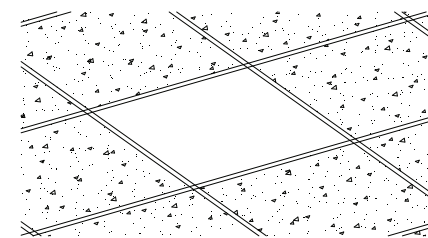


2. Fix the Panel into the Ceiling

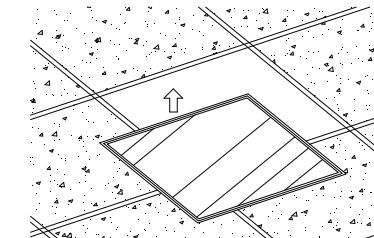

3. Connect the cable into the terminal

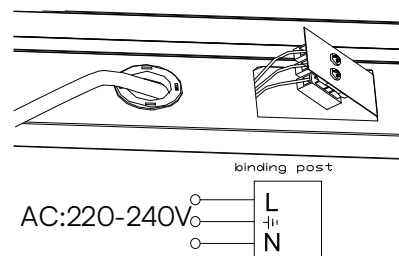


4. Turn on the switch and test the Panel

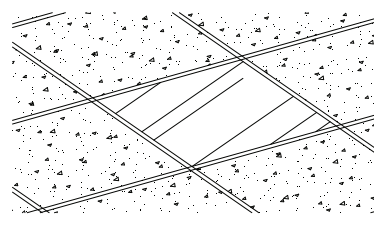


Installation for Surface


1. Remove the cover as shown below.

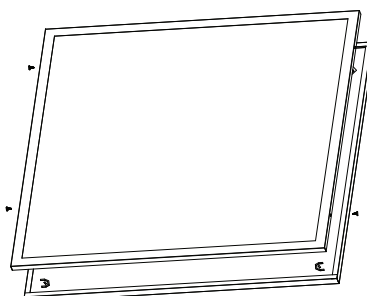

2. Connect the cable into the terminal.

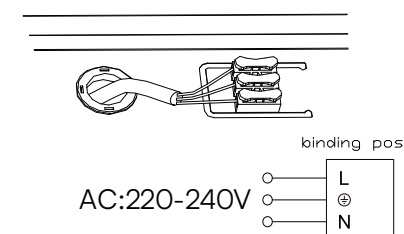

3. Fix the panel onto the ceiling.

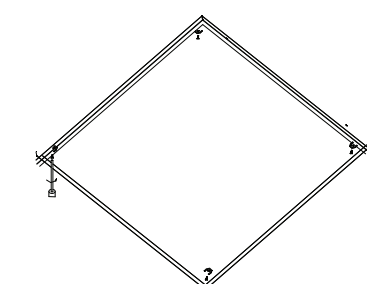

4. Fix the cover and test the fixture light

