



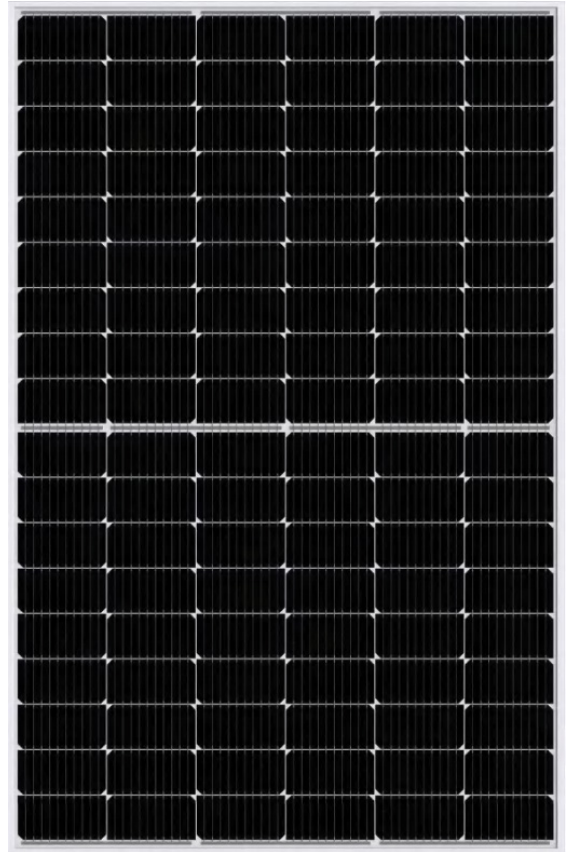

Tier 1 410W Solar Panel

SKU: 11899 Silver frame

12Yr quality guarantee | 25Yr power warranty

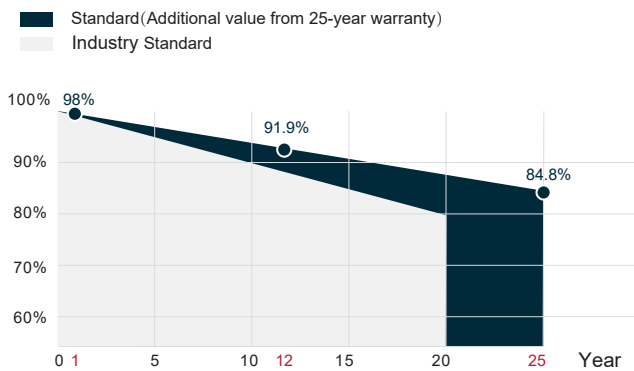

WARRANTY & GUARANTEE

Linear output power guarantee
 12 years: 91.9% power output
 25 years: 84.8% power output



WITHSTAND STRONG

Snow load 5400Pa
 Wind load 2400Pa



R&D AND PRODUCTION

Advanced production line.
 The leading solar cell cutting process and multi busbar design.



HIGH EFFICIENCY


Efficiency can reach 21.28%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.



POWER TOLERANCE

Power positive tolerance: 0~+3%



ENGINEERING DRAWING

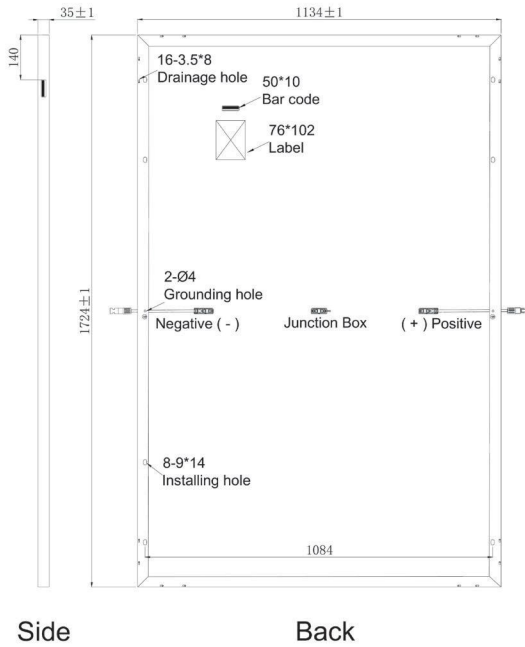

Mechanical Data

Dimensions	1724x1134x35mm
Weight	21.5 kg
Glass	3.2mm ultra clear embossed tempered coated glass
Output cables	4mm ² , symmetrical lengths 1100mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline PERC, 182x91mm
Number of cells	108 cells (Half-Cell)

V CHARACTERISTICS AT DIFFERENT IRRADIATION

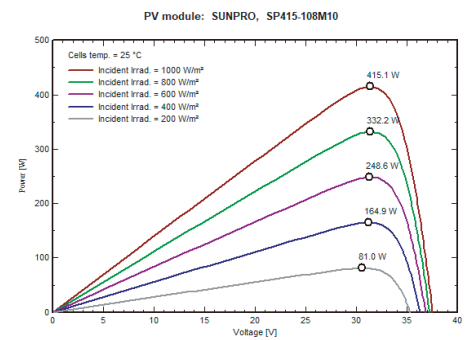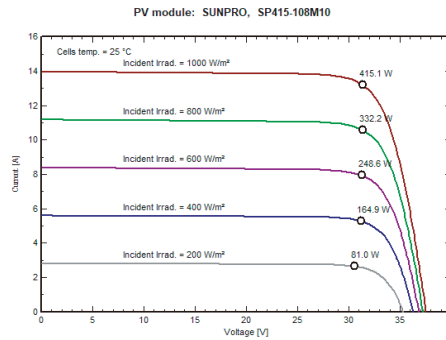

Electrical parameters at NMOT test conditions

(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Max power(Pmax)	305
Max power voltage(Vmp)	28.80
Max power current(Imp)	10.58
Open circuit voltage(Voc)	34.80
Short circuit current(Isc)	11.20

Electrical parameters at standard test conditions

(STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Max power(Pmax)	410
Max power voltage(Vmp)	31.25
Max power current(Imp)	13.12
Open circuit voltage(Voc)	37.33
Short circuit current(Isc)	13.90
Module Efficiency(%)	20.97
Max system voltage	DC 1500V(TÜV,UL) / 1000V(CUL)
Maximum Series Fuse Rating	25A

Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.048%/°C
Temp.Coeff.of Voc(TK Voc)	-0.27%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.34%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	44±2°C

Packing Configuration

Container	40'HQ
Pieces per pallet	62
Pallets per container	13
Pieces per container	806

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TÜV, CE, UL, CEC, INMETRO, WEEE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	12 years product warranty and 25 years 84.8% of power